

# F2 AB

## RETRACTABLE TAIL-LIFT FOR DRAWBAR COUPLING VEHICLES CHROMED GUIDES, DOUBLE EXTENSION CYLINDER

load capacity: ■ 1500 kg  
■ 2000 kg


FUTURA




### APPLICATIONS

The retractable tail-lift F2 AB is the ideal tail-lift for vehicles with drawbar couplings. The tail-lift is stowed away under the vehicle making it ideal for dock loading.

All hydraulic steel parts are treated with KTL hexacrylic electro-cathaphoresis

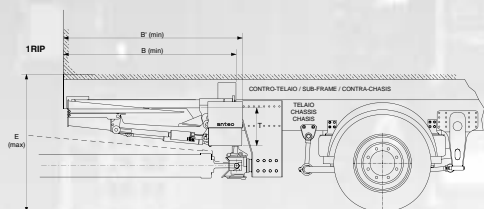

RIGID VEHICLE - 1 FOLD PLATFORM

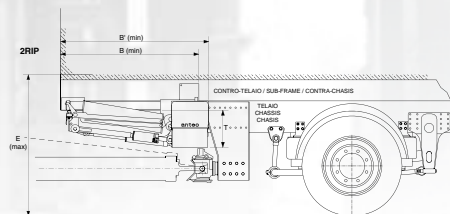


RIGID VEHICLE - 2 FOLDS PLATFORM

1 FOLDS PLATFORM

Mod.	Load Capacity (centre of gravity at 600 mm)	E max	Platform Depth * (example)	B min	B' min	T	Weight Kg**
F2AB15HS	1500 kg	1410	1533 (550 + 983)	1681	1771	378	580
			1583 (600 + 983)	1731	1821		630
F2AB20HS	2000 kg	1410	1533 (550 + 983)	1681	1771	378	600
			1583 (600 + 983)	1731	1821		650

2 FOLDS PLATFORM

Mod.	Load Capacity (centre of gravity at 600 mm)	E max	Platform Depth * (example)	B min	B' min	T	Weight Kg**
F2AB15HS	1500 kg	1410	1583 (850 + 733)	1288	1378	378	610
F2AB20HS	2000 kg	1410	1583 (850 + 733)	1288	1378	378	630



\*For 1 fold platform: platform depth available from 1333 mm to 1983 mm. \*\*Approximate weight for tail-lift with platform width 2450 mm. Centre of gravity of the vehicle depending on the type of arm and the size of the installations on the vehicle (see assembly instructions). The above mentioned weights are approximate and may vary according to production. Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight. Anteo are not responsible for the positioning and fixing of the drawbar coupling.

RETRACTABLE  
LIFTS