

F3CL 075

CANTILEVER TAIL-LIFTS - 4 CYLINDERS

load capacity: 750 kg

NEW
2008

WEIGHT
STARTING AT
225 kg!

CANTILEVER
LIFTS

LIGHT
COMMERCIALS





APPLICATIONS

The cantilever lift F3CL 075 is suitable for vehicles up to 7.5 tonnes.

All hydraulic steel parts
are treated with KTL hexacrylic
electro-cathoresis

TECHNICAL DATA

Mod.	Arm Length (mm)	Arm Width	
		W123 (mm)	W58 (mm)
F3CL075C	540	1230	580
F3CL075H	640	1230	580

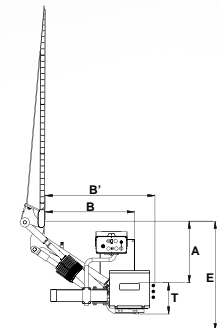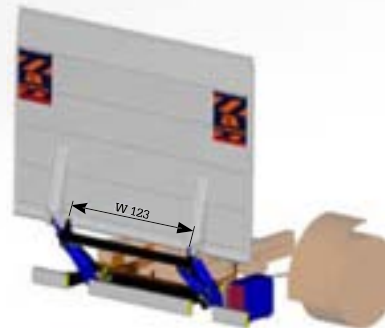

Mod.	Load capacity (centre of gravity at 600 mm)	Standard Platform Dimensions		Weight * Kg	A		E	B	B1	T
		Depth	Width		min.	max.	max.	min.	min.	
F3CL075C	750 Kg	1200	on demand	225	235	430	985	448	523	190
F3CL075H		1400*			295	495	1140	526	601	

*Indicative weight of tail-lift supplied in kit without rear bumper and with a 1400 mm depth platform. The weight may vary according to width.

Anteo reserves the right to change weights and technical specifications without prior notice. No indemnity for damages can be claimed from Anteo for changes in technical specifications and/or in weight.



VARIOUS SOLUTIONS ACCORDING TO WHEEL BASE AND OVERHANG



F3CL 075

are available for all vehicles with double "C" chassis.

W123 Standard
(W58 not available)

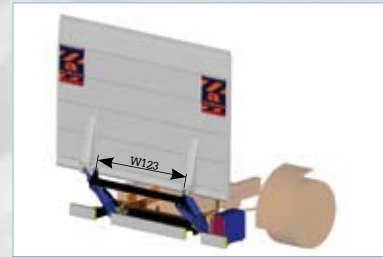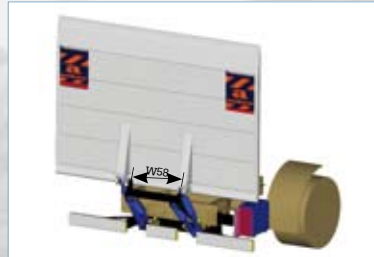


CANTILEVER
LIFTS

Citroën JUMPER 06
Fiat DUCATO 06
Peugeot BOXER 06

F3CL 075 W58

Quick fitting without making holes in the chassis using the original holes.


Note: The instructions reported refer to vehicles with original chassis that have not been lengthened

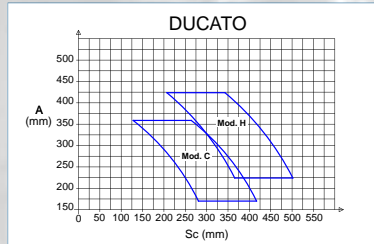

Ford TRANSIT

F3CL 075 W58 (W 123 on demand)

Quick fitting without making holes in the chassis using the original holes.

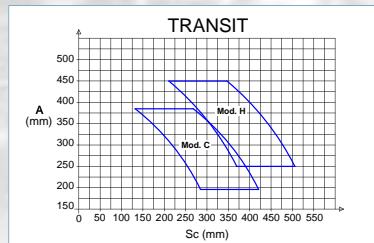


NB: the fitting is referred to chassis vehicles with front wheel drive only.

Mercedes SPRINTER 06
Volkswagen CRAFTER

F3CL 075 W58

(W 123 on demand)

Quick fitting without making holes in the chassis using the original holes.

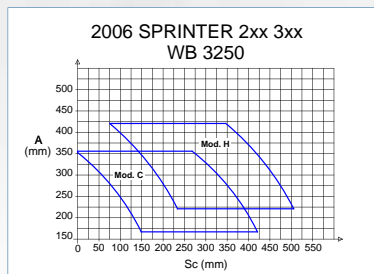

**2006 SPRINTER 2xx 3xx
WB 3665 - 4325**

